




E31
JANTES
RIMS

208 T16

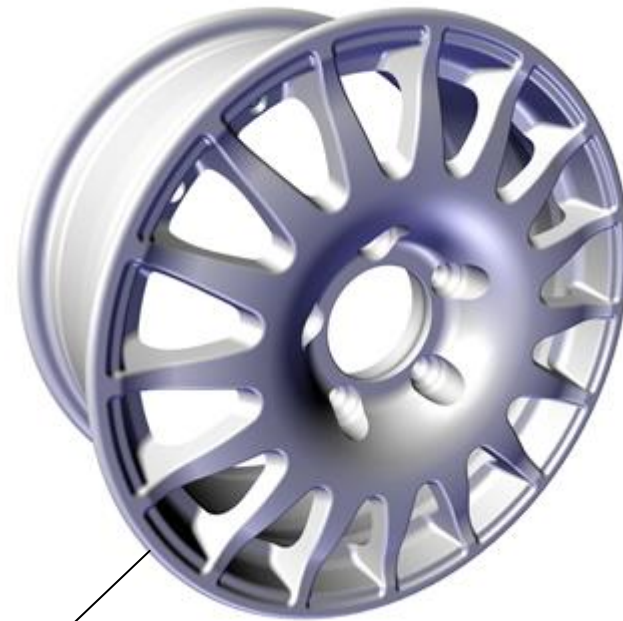

| REP | REFERENCE | QTE | DESIGNATION |
|-----|----------------|-----|--|
| 1 | 1E3126182A | 4 | Jantes 8x18 Asphalte <i>Rim 8x18 tarmac</i> |
| 2 | 1E3123776A | 4 | Jantes 7x15 Terre <i>Rim 7x15 Gravel</i> |
| 3 | | | |
| 4 | | | |
| 5 | | | |
| 6 | | | |
| 7 | | | |
| 8 | | | |
| 9 | | | |
| 10 | | | |
| 11 | | | |
| 12 | | | |
| 13 | | | |
| 14 | | | |
| - | 1E3121373A | 4 | Valve <i>Valve</i> |
| - | 1E1318085B | 20 | Ecrou de roue conique Ø12x125 <i>Conical wheel nut Ø12x125</i> |
| - | 1E3123910B-OUT | 1 | Clé de serrage pour écrou 16 mm <i>Tightening wrench for 16 mm nut</i> |

| REP | REFERENCE | QTE | DESIGNATION |
|-----|-----------|-----|-------------|
| 18 | | | |
| 19 | | | |
| 20 | | | |
| 21 | | | |
| 22 | | | |
| 23 | | | |
| 24 | | | |
| 25 | | | |
| 26 | | | |
| 27 | | | |
| 28 | | | |
| 29 | | | |
| 30 | | | |
| 31 | | | |
| 32 | | | |
| 33 | | | |
| 34 | | | |

 **Serrer et desserrer au minimum 4 fois chaque jante neuve sur un moyeu afin de "roder" les inserts (positionnement et tenue des inserts).**

 **Tight and loose every new rim at least 4 times to settle the inserts (positioning and holding of inserts).**



100 N.m